

G3 HAPTIC SYSTEM

Benefit from a robust and compact actuator form factor while retaining the same core architecture and software integration process that lifted D-BOX ahead of its competitors. This updated version of our renowned G3 system now comes with our ACM G3 FLEX that features a 120/230V switch for flexible power configurations.

PERFORMANCE UNDER MAXIMUM LOAD	2501 / 250HD	400I / 400HD
MAXIMUM LIFTING CAPACITY PER ACTUATOR	250 lb / 114 kg	400 lb / 182 kg
HORIZONTAL LOAD	Translation on limited friction surfaces can be done on weights up to 3 times vertical lifting capacity.	
MAXIMUM STROKE	3 inch / 76.2 mm	
MAXIMUM VELOCITY	100 mm/s	
MAXIMUM ACCELERATION	+/-1g-force	
FREQUENCY RANGE	0-100 Hz	
OPERATING TEMPERATURE RANGE	0-40°C	
OPERATING HYGROMETRY	10 to 85% (free from condensing)	

Note: It is not recommended to connect your D-BOX system to a GFCI breaker type.


POWER REQUIREMENTS		AVERAGE POWER To be used for electric consumption	PEAK CURRENT To be used for breaker specification	
120 V 50/60 HZ	250 lb	1 TO 2 ACTUATORS	240 W	3.75 A
		3 TO 4 ACTUATORS	480 W	7.5 A
	400 lb	1 TO 2 ACTUATORS	320 W	3.75 A
		3 TO 4 ACTUATORS	640 W	7.5 A
230 V 50/60 HZ	250 lb	1 TO 2 ACTUATORS	266 W	3.75 A
		3 TO 4 ACTUATORS	533 W	7.5 A
	400 lb	1 TO 2 ACTUATORS	373 W	3.75 A
		3 TO 4 ACTUATORS	746 W	7.5 A

DBOX Feel it all


D-BOX G3 HAPTIC SYSTEM




SYSTEM OVERVIEW*

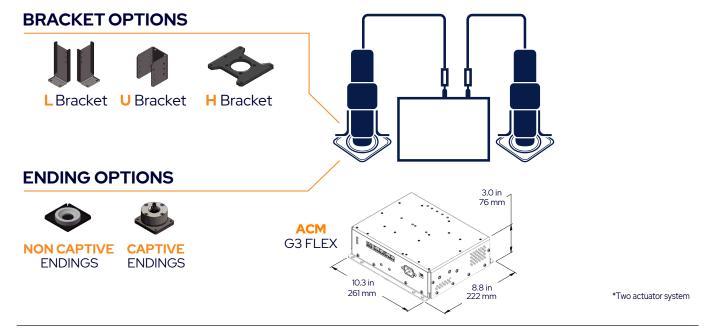

3" ACTUATOR FAMILY





*HD refers to an actuator designed with a double nut ball screw for higher durability in high strain environment and extended periods of time.



© 2024 D-BOX Technologies. All Rights Reserved. Specifications are subject to change without notice. D-BOX is a registered trademark. All other brand or product names are trademarks of their respective owners. Product photos and pictures are for illustration purposes only and may differ from the real product's appearance.



246-914-0002-EN2 - November 2024

D-**BOX** Feel it all